

Part No. 4046340

PERFORMANCE

	@80°F/60%	@75°F/50%
Capacity (Pints/Day)	705	471
Energy Factor (Pints/kWh)	7.6	5.6
(Liters/kWh)	3.6	2.6
Current draw (amps)	18.2 (208V)	17.0 (208V)
	15.8 (240V)	14.7 (240V)

ELECTRICAL

Voltage, Phase, Frequency 208-240V, Single, 60hz

Power (watts) 3,740

Btu/h Total 45,300

Btu/h Motor Load 13,200

Btu/h Heat of Condensation 32,080

Power Cord Type & Length NEMA 6-30P, 6 ft.



MCA / MOP 27 amp / 45 amp

CFM 1800

Operating Range 56/40 to 95/100

Temp °F/% RH

Control Onboard digital interface with terminal block for external control

Air Filter MERV-13
18"W x 20" H x 2"D
(Part #4038233, Requires 2)

Weight 300 lbs.

Refrigerant R454B, 100 oz.

Drain Connection 3/4" FNPT

P-Trap Required Yes

Hanging Built-in 3/8" threaded inserts


Duct Kit Sold seperately
Exhaust Kit (Part #4044431)
Intake Kit (Part #4044432)

Warranty 3-Year Limited*

*1-year full warranty, plus 2-years of parts replacement.

Anden reserves the right to change specifications without notice.

08.26 A © 2026 Anden | anden.com | 877-420-1330

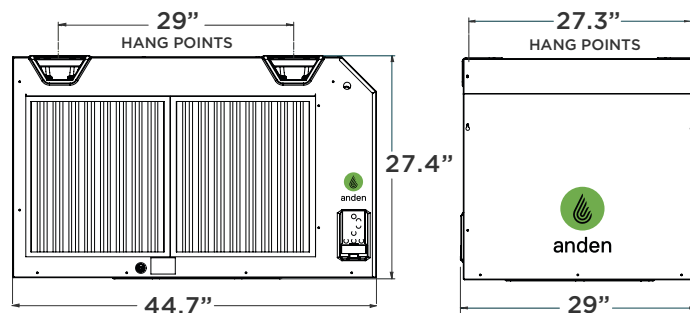

FEATURES

- + **Digital Onboard Control:** easy operation of the machine, with low voltage terminal block for optional external control
- + **Integrated Suspension Points:** allow for easy movement and simple overhead installation
- + **Service Friendly:** removable side panel for easier in-place maintenance and serviceability
- + **Enhanced Quality and Reliability:** refined engineering and upgraded components deliver improved durability and dependable performance.

INCLUDED ITEMS

Leveling feet, condensate hose, barb fitting



Scan Here
for More

